


BULK CURRENT INJECTION

The F-140 is used for BCI testing in accordance with automotive specifications as well as diagnostic bulk current injection testing up to 1 GHz. The useable frequency range is 100 kHz – 1 GHz. The input power rating is 100 watts for 30 minutes. The insertion loss loss shown below is typical.

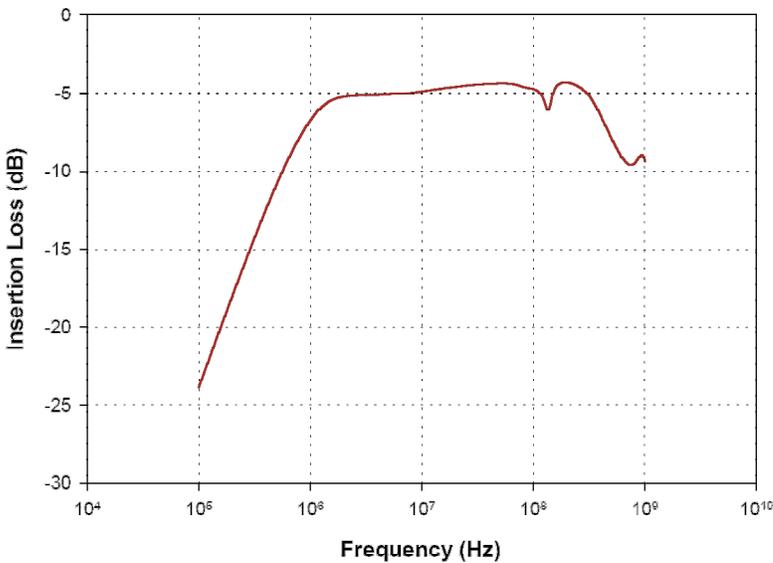

Specifications

Frequency: 100 kHz – 1 GHz
Inner diameter: 40 mm
Outer diameter: 127 mm
Height: 70 mm
Input Power rating: 100 watts

Accessories

FCC-BCICF-2 • Calibration Fixture
Bandwidth: 100 kHz – 1 GHz



Fischer Custom Communications, Inc.

19220 Normandie Ave., Unit B Torrance, CA 90502
Phone: 310-303-3300
Email: sales@fischercc.com

© Fischer Custom Communications, Inc.