
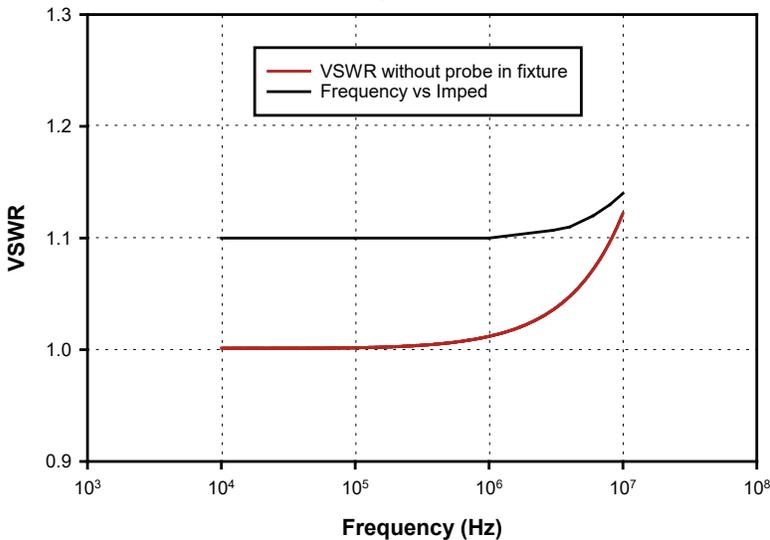


## CALIBRATION FIXTURE

Injection Probe Calibration Fixtures are a part of the test equipment required by most of the Bulk Current test procedure specifications. The test fixture allows the user to quickly and easily calibrate the Injection Probe prior to performing the compliance testing.

This calibration fixture offers two important benefits.

1. Due to variable circuit impedances or resonances in cables and cable looms, the calibration fixture is used to establish the forward power into the injection probe needed to develop the specified currents in the system under test.
2. The fixture can be used to measure the injection probes insertion loss.

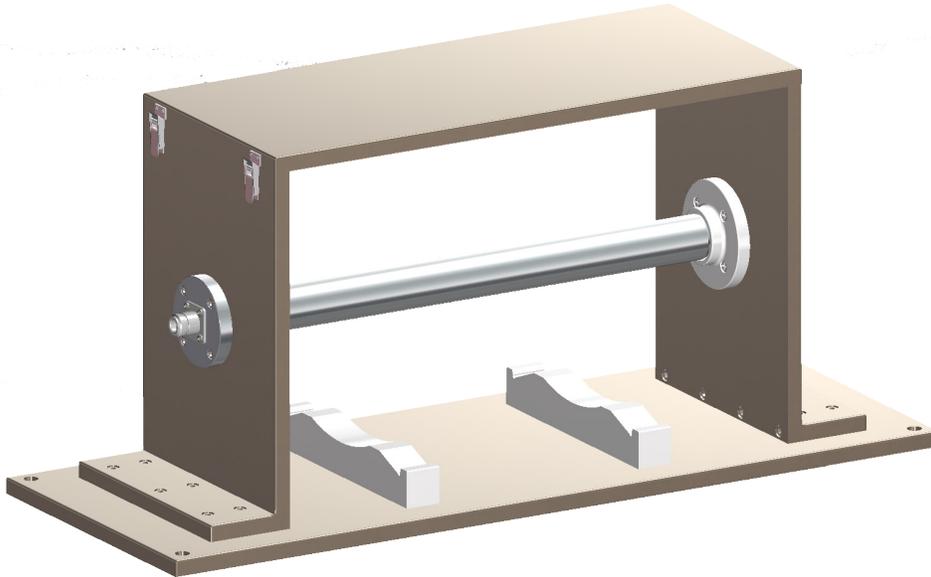

### Specifications

Frequency: 10 kHz – 10 MHz  
 VSWR: Meets DO-160G Sec. 20.4  
 Clause b Fig. 20-8 requirements  
 (10 kHz – 10 MHz)

### Dimensions

Length: 226 mm  
 Width: 173 mm  
 Height: 127 mm



Fischer Custom Communications, Inc.

20603 Earl St., Torrance, CA 90503  
 Phone: 310-303-3300  
 Fax: 310-371-6268  
 Email: sales@fischercc.com

© Fischer Custom Communications, Inc.