


# F-200921-1005-2

## CURRENT PROBE

The F-200921-1005-2 is used to measure common mode currents from 10 kHz – 400 MHz. It is for laboratory use by properly trained RF technical personnel using best engineering practices.

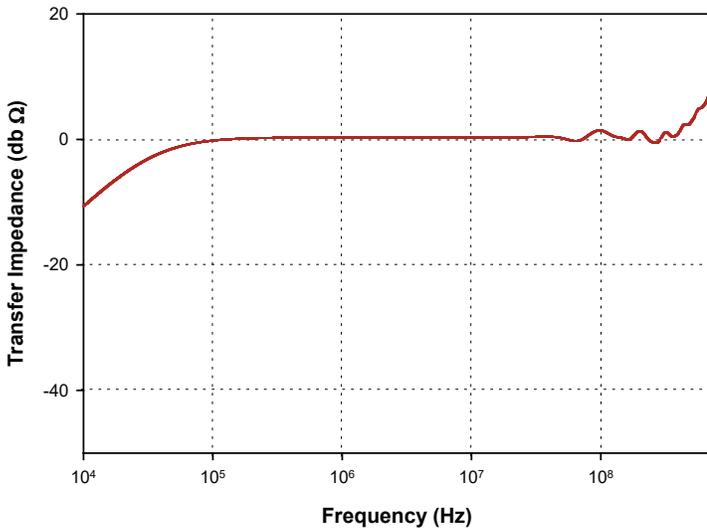

### Specifications

- Frequency: 10 kHz – 400 MHz
- Internal diameter: 40 mm
- External diameter: 98 mm
- Height: 38 mm
- Transfer Impedance: See Curve
- Connector: Type-N
- DC to 400 Hz: 500 amperes
- RF(CW): 3 amperes
- Peak Pulse Current<sup>1</sup>: 100 amperes

1: Depends upon the pulse width and pulse rep. rate.



Fischer Custom Communications, Inc.

19220 Normandie Ave., Unit B Torrance, CA 90502  
Phone: 310-303-3300  
Email: sales@fischercc.com

© Fischer Custom Communications, Inc.