


# F-120-6A

## BULK CURRENT INJECTION

The F-120-6A is a broadband, high efficiency injection probe. Large RF currents can be coupled on to a signal or power circuit under test between 10 kHz – 400 MHz.

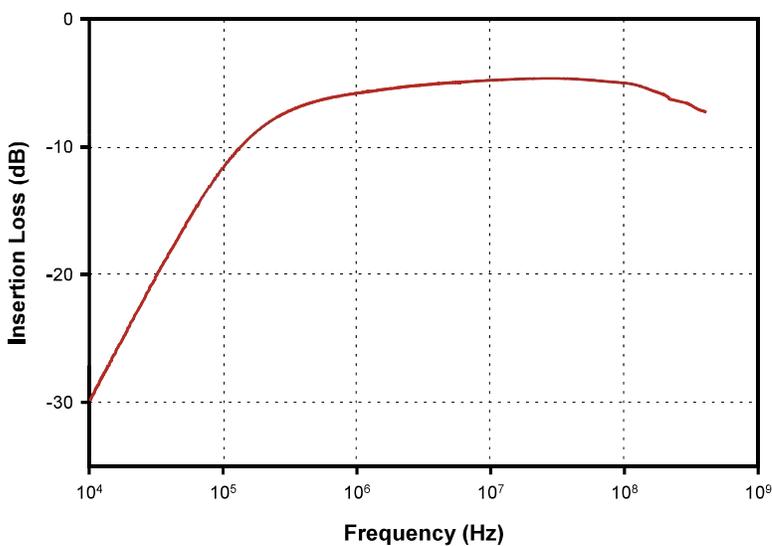

### Specifications

- Frequency: 10 kHz – 400 MHz
- Inner diameter: 40 mm
- Outer diameter: 127 mm
- Height: 70 mm
- Input Power rating: 100 watts (30 minutes)  
150 watts (15 minutes)  
200 watts (5 minutes)

### Accessories

- FCC-BCICF-1 • Calibration Fixture  
Bandwidth: 10 kHz – 400 MHz
- F-52B • Current Probe  
Bandwidth: 10 kHz – 400 MHz



Fischer Custom Communications, Inc.

19220 Normandie Ave., Unit B Torrance, CA 90502  
Phone: 310-303-3300  
Email: sales@fischercc.com

© Fischer Custom Communications, Inc.