


F-120-8F

BULK CURRENT INJECTION

The F-120-8F has been designed to extend the use of conducted immunity testing over the bandwidth of 10 kHz – 400 MHz. The useable frequency range is 10 kHz - 400 MHz. A typical calibration chart is shown below.

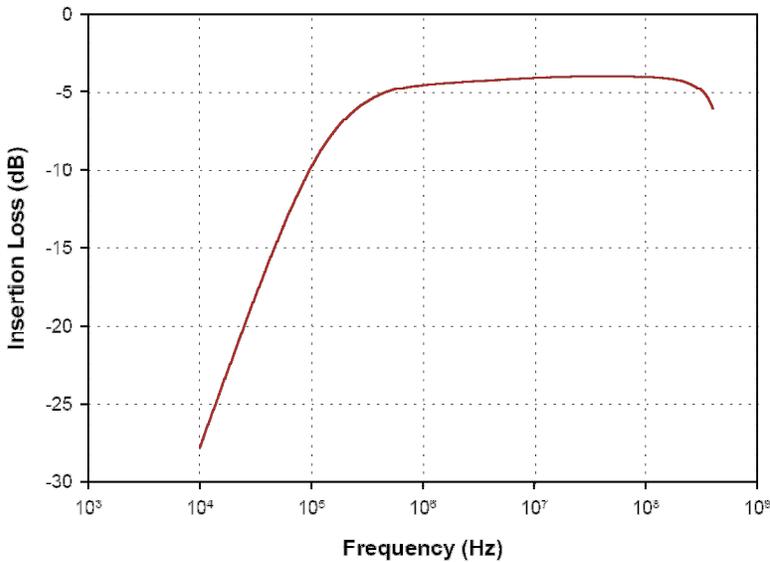

Specifications

Frequency: 10 kHz – 400 MHz
Inner Diameter: 40 mm
Outer Diameter: 127 mm
Height: 134 mm
Input Power rating: 200 watts

Accessories

Calibration Fixtures*
F-170421-1008-1, FCC-BCICF-4
F-52B • Current Probe
Bandwidth: 10 kHz – 400 MHz

* Contact sales@fischercc.com to determine the best fixture for your needs.



Fischer Custom Communications, Inc.

19220 Normandie Ave., Unit B Torrance, CA 90502
Phone: 310-303-3300
Email: sales@fischercc.com

© Fischer Custom Communications, Inc.