


# F-120-9

## BULK CURRENT INJECTION

The F-120-9 has been designed to extend the use of conducted immunity testing over the bandwidth of 10 kHz – 230 MHz. The F-120-9 is a high efficiency Injection Probe used primarily for low frequency conducted susceptibility testing. The input power rating is 100 watts for 30 minutes.

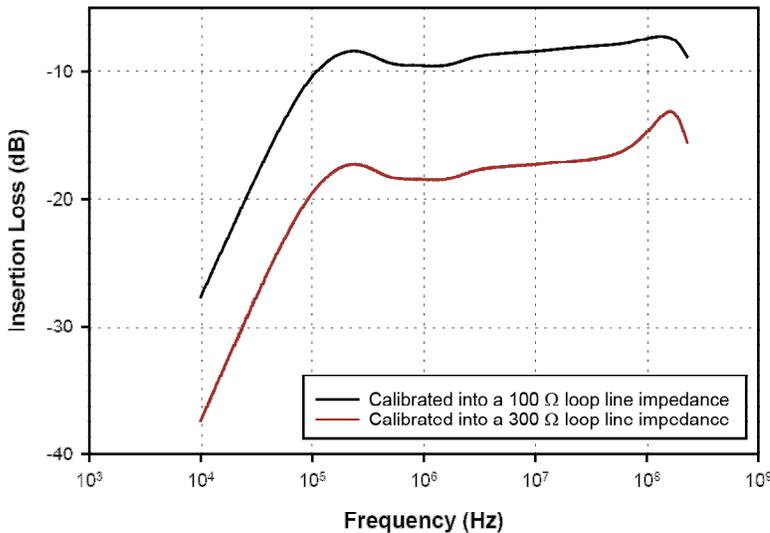

### Specifications

Frequency: 10 kHz – 230 MHz  
Inner diameter: 40 mm  
Outer diameter: 127 mm  
Height: 70 mm  
Input Power rating: 100 watts (30 minutes)

### Accessories

FCC-BCICF-1 • Calibration Fixture  
Bandwidth: 10 kHz – 400 MHz  
F-52B • Current Probe  
Bandwidth: 10 kHz – 400 MHz



Fischer Custom Communications, Inc.

19220 Normandie Ave., Unit B Torrance, CA 90502  
Phone: 310-303-3300  
Email: sales@fischercc.com

© Fischer Custom Communications, Inc.