


HIGH TRANSMISSION BANDWIDTH CDN FOR IEC-61000-4-6

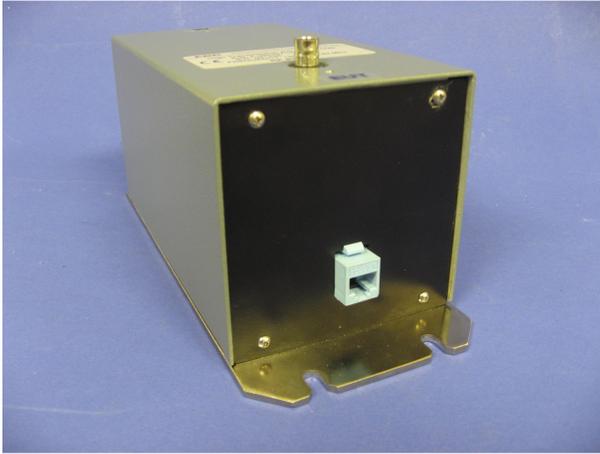

The F-140714-1004-1 is Coupling Decoupling Network (CDN) for IEC-61000-4-6 conducted immunity testing that is capable of passing all transmission quality parameters for TIA 568 Category 6 10GB Transmission over copper wire.

As digital telecommunications speeds increase, tolerances for electromechanical imperfections in the transmission path decrease. These imperfections include the typical cable to connector and connector to connector interfaces routinely encountered in telecommunications cabling as well as the challenge of connecting the CDN to telecommunications cabling with minimal impact to the telecommunications signal

Recent field testing experience has demonstrated the need for the smallest impact to the digital telecommunications signals. Successful passing of IEC 61000-4-6 conducted immunity testing could only be accomplished using a CDN with the highest digital transmission qualities: [Category 6 10GB Transmission over copper wire](#).

Validation of products intended for high speed telecommunications applications is performed using a Fluke DTX-1800 digital cable tester. The Fluke digital cable tester measures the transmission quality parameters including NEXT, Insertion Loss, Return Loss, and several others through the CDN. The performance of the CDN is compared to an appropriate telecommunications cable Category. The high transmission quality CDN has positive margins for all Fluke measurements per TIA 568 Category 6 10GB Transmission parameters over copper wire.

Specifications

4 balanced pair

Frequency: 150 kHz – 80 MHz

Common Mode Impedance: 150 kHz – 30 MHz 150Ω +20Ω
30 MHz – 80 MHz 150Ω +60Ω -45Ω

Phase Angle: 150 kHz – 30 MHz 0° ±20°

RF Attenuation (RF port to EUT): 9.5 ± 1dB

RF test voltage: <30 volts

Transmission bandwidth of differential signal (symmetrical) EUT – AE

250MHz 500MHz

Insertion Loss:	< 2dB	<3dB
Return Loss:	> 20 dB	>10dB
Next:	> 40 dB	>28dB
PSNext:	> 39 dB	>28dB
PS ACR-F(PSELFEXT):	> 30 dB	>25dB

Connector: RJ45

Rated for POE

F-140714-1004-1



Fischer Custom Communications,

20603 Earl St., Torrance, CA 90503 · Phone: 310-303-3300 Fax 310-371-6268 · email: sales@fischercc.com