


F-35A-L

CURRENT PROBE

The F-35A-L is for laboratory and field testing. It is used to measure emissions from 10 Hz – 108 MHz. The F-35A-L can operate up to 200 amperes of DC – 400 Hz, and 100 amperes of peak pulse.

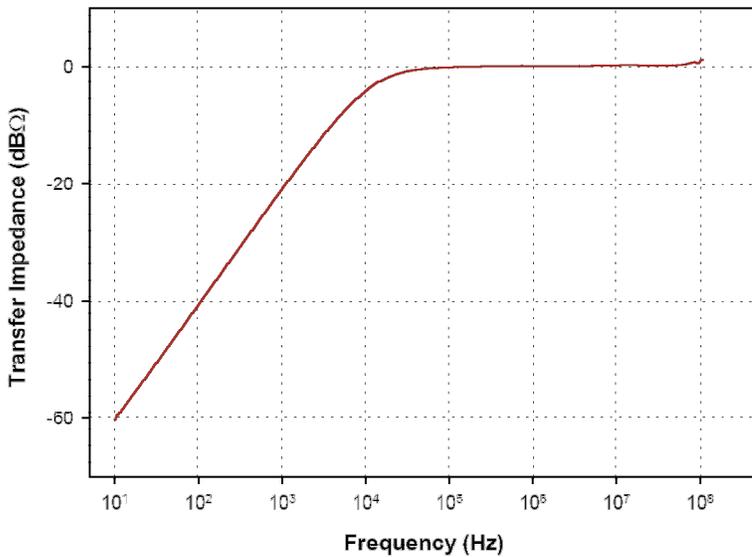

Specifications

Frequency:	10 Hz – 108 MHz
Internal diameter:	32 mm
External diameter:	98 mm
Height:	38 mm
Z _t Ω ¹ :	1
dBΩ ¹ :	0
Connector:	Type-N
DC to 400 Hz:	200 amperes
RF(CW):	3 amperes
Peak Pulse Current ² :	100 amperes

1: Probe calibrated with 50 Ω + j0Ω Load Impedance.

2: Depends upon the pulse width and pulse rep. rate.



Fischer Custom Communications, Inc.

19220 Normandie Ave., Unit B Torrance, CA 90502
Phone: 310-303-3300
Email: sales@fischercc.com

© Fischer Custom Communications, Inc.