
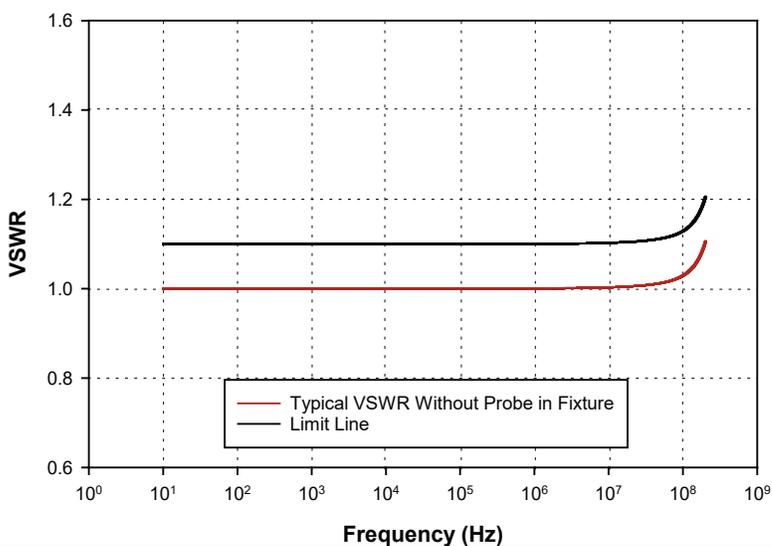


FCC-MPCF-2-67/142/53

CALIBRATION FIXTURE

The FCC-MPCF-2-67/142/53 Calibration Fixture is used to calibrate current probes. Four latches secure the top cover to the top half of the fixture. When the top cover of the fixture is removed, the current probe can easily be clamped around the center conductor. The FCC-MPCF-2-67/142/53 accommodates Fischer Custom Communications Current Probes with a 67 mm internal diameter, 142 mm outer diameter, and a 53 mm height.

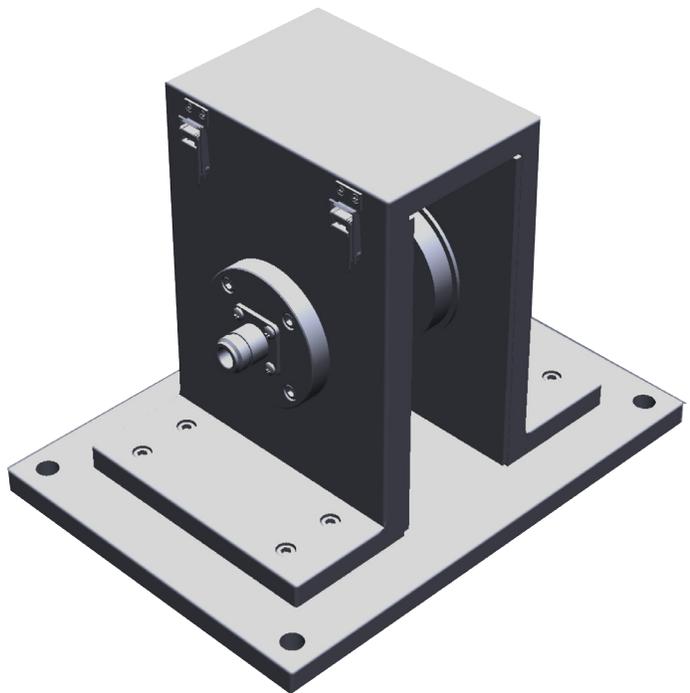

Specifications

Frequency:	10 Hz – 200 MHz
VSWR:	<1.5:1
Dimensions	
Length:	250 mm
Width:	177 mm
Height:	162 mm
Weight:	2.2 kg

Current Probes

F-10A, F-10A-1, F-14A, F-14A-1, F-16A, F-16A-1, F-40-5, F-72, F-72-1, F-72-2, F-72-7



Fischer Custom Communications, Inc.

20603 Earl St., Torrance, CA 90503
Phone: 310-303-3300
Fax: 310-371-6268
Email: sales@fischercc.com

© Fischer Custom Communications, Inc.