




The FCC-MPCF-2-70/125/38 Calibration Fixture is used to calibrate current probes. Four latches secure the top cover to the top half of the fixture. When the top cover of the fixture is removed, the current probe can easily be clamped around the center conductor.

The FCC-MPCF-2-70/125/38 accommodates Fischer Custom Communications Current Probes with a 70mm internal diameter, 125mm outer diameter, and a 38mm height.

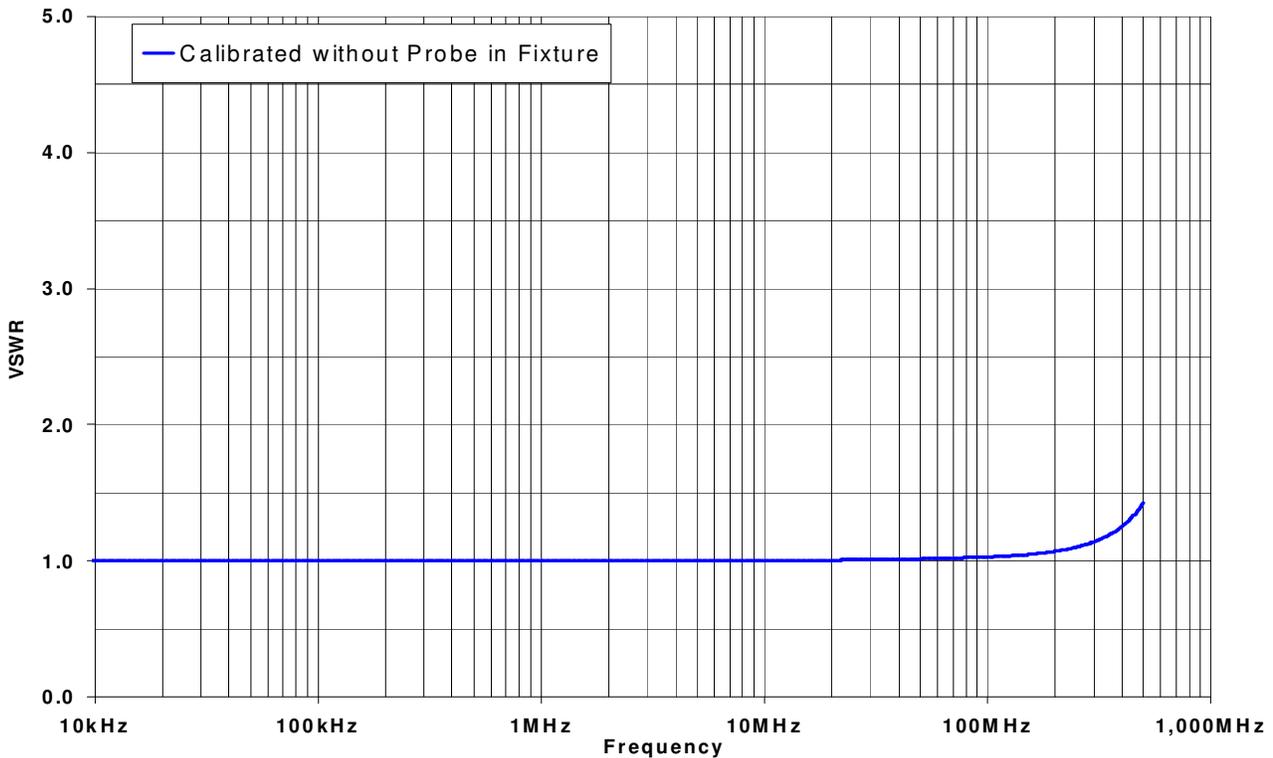

Specifications

Frequency: 10 kHz – 400 MHz

VSWR: <2:1

Dimensions: (L x W x H) 250mm x 177mm x 162mm

Weight: 2.2kg

Current Probe Model Numbers: F-70, F-71, F-75

FCC-MPCF-2-70/125/38



Fischer Custom Communications, Inc.

20603 Earl St., Torrance, CA 90503 · Phone: 310-303-3300 Fax 310-371-6268 · email: Sales@fischerCC.com

© Fischer Custom Communications, Inc.
600172

All rights reserved • Printed in USA