


F-170701-1008-1

BULK CURRENT INJECTION

The F-170701-1008-1 is a high efficiency, high power Injection Probe for use between 10 MHz – 400 MHz. It has a typical Insertion Loss data is shown below. The CW input power rating is 1000 watts for 30 minutes.

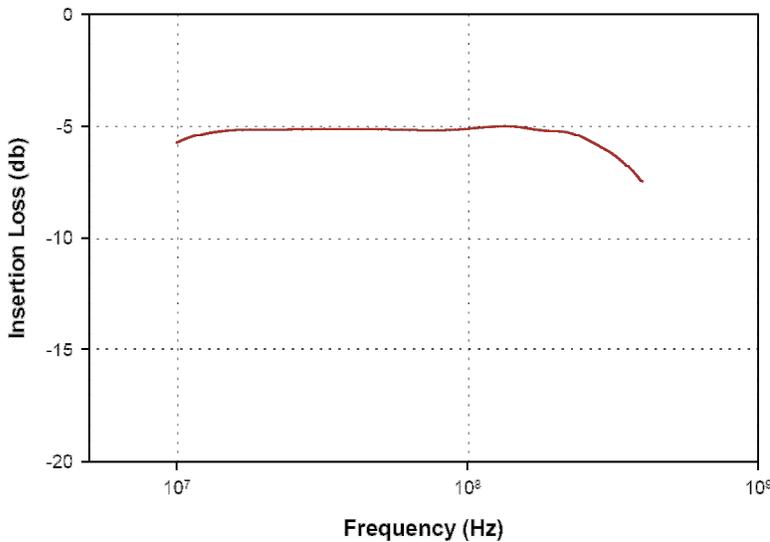

Specifications

Frequency: 10 kHz – 400 MHz
Inner Diameter: 40 mm
Outer Diameter: 127 mm
Height: 70 mm
Input Power rating: 1000 watts

Accessories

FCC-BCICF-1 • Calibration Fixture
Bandwidth: 10 kHz – 400 MHz
F-52B • Current Probe
Bandwidth: 10 kHz – 400 MHz



Fischer Custom Communications, Inc.

20603 Earl St., Torrance, CA 90503
Phone: 310-303-3300
Email: sales@fischercc.com

© Fischer Custom Communications, Inc.