


F-200921-1005-1

CURRENT PROBE

The F-200921-1005-1 is used to measure common mode currents from 1 kHz – 750 MHz. It is for laboratory use by properly trained RF technical personnel using best engineering practices.

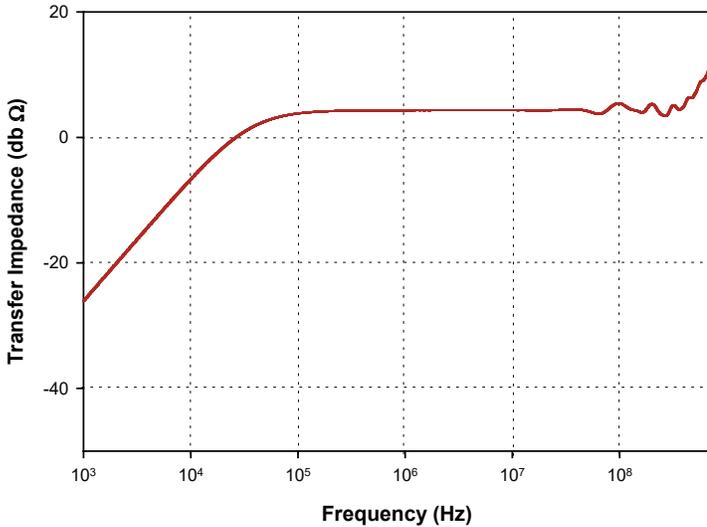

Specifications

Frequency:	1 kHz – 750 MHz
Internal diameter:	40 mm
External diameter:	98 mm
Height:	38 mm
Transfer Impedance:	See Curve
Connector:	Type-N
DC to 400 Hz:	500 amperes
RF(CW):	3 amperes
Peak Pulse Current ¹ :	100 amperes

1: Depends upon the pulse width and pulse rep. rate.



Fischer Custom Communications, Inc.

19220 Normandie Ave., Unit B Torrance, CA 90502
Phone: 310-303-3300
Email: sales@fischercc.com

© Fischer Custom Communications, Inc.