


COUPLING/DECOUPLING NETWORK

FCC-801-M1-32A-1

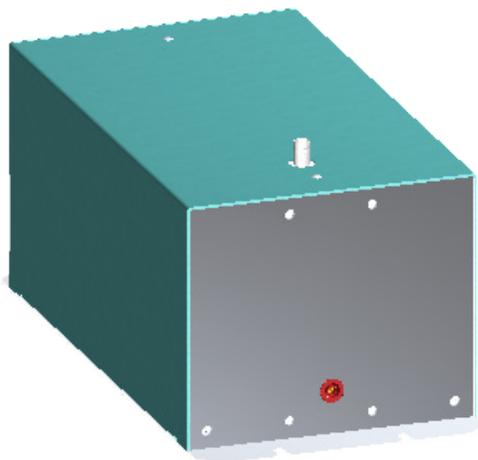

Specifications

Application:	IEC 61000-4-6 Conducted Immunity
Frequency:	150 kHz – 230 MHz
Supply Lines:	1 Power Conductor
Impedance:	Frequency dependent 150 kHz – 26 MHz: $150 \Omega \pm 20 \Omega$ 26 MHz – 80 MHz: $150 \Omega +60 \Omega - 45 \Omega$ Published IEC 61000-4-6, Table 3 80 MHz – 230 MHz $150 \Omega +60 \Omega - 60 \Omega$ Published IEC 61000-4-6, Annex B Table B.1
Maximum Current:	32 A
Maximum Voltage:	DC - 60 Hz, 1000 V line to ground maximum
RF Disturbance Port:	
Power Rating:	9 Watts max
EUT/Mains Connector:	4 mm Multi-Contact Safety Socket
RF Disturbance Port:	50 Ω BNC
Dimensions (L x W x H):	31 cm x 18 cm x 15 cm
Weight:	4.4 kg

FCC

Fischer Custom Communications, Inc.

19220 Normandie Ave., Unit B Torrance, CA 90502
Phone: 310-303-3300

Email: sales@fischercc.com

© Fischer Custom Communications, Inc.